

# CamTron Cameras

## Indoor Domes




### CTDD-5351: Features and Specifications

**CAMTRON**

- SONY 1/3" Super HAD High Resolution Color CCD
- Ultra High Resolution of 540TV Lines
- Day & Night Capability with High Sensitivity of 0.002Lux
- 70% Disk Saving with DNR (Digital Noise Reduction) Technology
- Wide Range Auto Tracking White Balance (Color Temperature 1,800°K ~ 10,500°K)
- Privacy image masking with free position
- VBS-EXTRA for connection to LCD monitor
- Controlled by OSD menu
- Effective Pixels: 380K(N), 440K(P)
- Min. Illumination: Color - 0.3Lux, B/W - 0.002Lux (Sense-up)
- Shutter Speeds: 1/60(N) or 1/50(P) ~ 1/120,000sec.
- S/N Ratio: More than 50dB (AGC off)
- OSD Functions
- Main Mode: Lens (Manual, DC), Shutter, White Balance, BLC, AGC, DNR, Sense-Up (Auto 2X ~ 128X, Off)
- Special Mode: Camera ID, Color (On, Auto), SYNC, Sharpness (0~31), Privacy & Motion Detection (4 Programmable Zone), Mirror



70157C

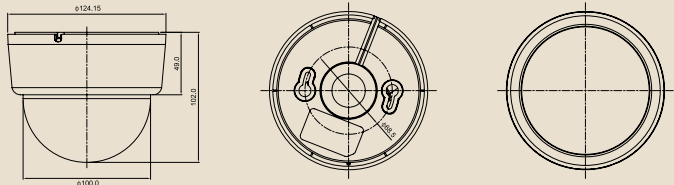

(unit: mm)

- ICR (Infrared Cut Filter Removal) Day&Night Function
- Lens: Vari-Focal Auto Iris Lens (F1.2, 2.9~10mm)
- Power Supply: 24VAC/12VDC (Max. 240mA/360mA)
- Weight: 630g


### CTDD-5357: Features and Specifications

**CAMTRON**

- High Resolution: 580TV lines (Color), 700TV lines (B/W)
- Super DNR (Digital Noise Reduction) Technology (Saving up to 70% of DVR's storage in MPEG 4)
- ICR (Infrared Cut Filter Removal) Day&Night Function
- Motion Detection(8 Zones, Alarm Output)
- Digital Image Stabilizer Compensating for vibration of the camera
- Additional Functions : OSD, Privacy Masking (8 Zones), Sens-up(X256), DZoom(x10)
- Multi-languages
- Low Light Sensitivity: 0.3Lux(COLOR)
- Effective Pixels: 380K(N), 440K(P)
- Dynamic Range: 52dB(x128)
- S/N Ratio: More than 52dB (AGC off)
- Min. Illumination: 0.3Lux (Color), 0.03Lux (BW)
- Shutter Speeds: 1/60(N) or 1/50(P) ~ 1/120,000sec.



71411C

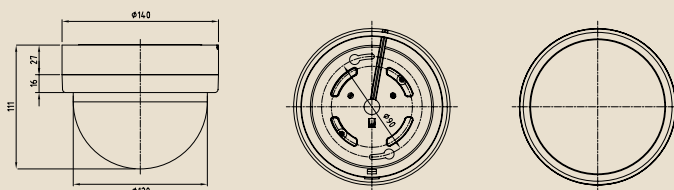

(unit: mm)

- Lens: Varifocal Auto Iris Lens (F1.2, 2.9~10mm)
- Power Supply: 12VAC/12VDC (Max. 320mA/440mA)
- Weight: 650g




## WM-120: Features and Specifications

**CAMTRON**



71412

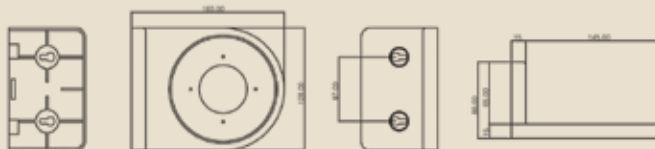

(unit: mm)

- Wall mount applications
- Quick and easy to install
- Suits CTDD-5351